For Residential and Commercial Applications

Job Name	Contractor
Job Location	Approval
Engineer	Contractor's P.O. No.
Approval	Representative

Series

Swivel Gooseneck

Sizes:

Swivel Gooseneck 3-1/2" to 8-1/2"

Features & Benefits:

- Swing Nozzle stream regulator outlet
- Polished Chrome Finish
- Lead-free Heavy Duty Wall Mounted Commercial Kitchen Faucet
- The material ensures quality and reliability
- Single supply for cold or tempered water
- The durable brass construction is designed for a lifetime of use
- Warranty 3 Years

Product Compliance:

California Proposition 65

Performance Data:

Pressure: 20-125 PSI

Temperature: 40°F to 140°F

Aerators:


Standard Aerator	Suffix
□ 0.20 GPM	E1
□ 0.50 GPM	E2
□1.00 GPM	E3
□1.50 GPM	E4
□1.80 GPM	E5
□ 2.20 GPM	E6

Vandal Resistant Aerator	Suffix	
□0.35 GPM	G1	
□ 0.50 GPM	G2	
□1.00 GPM	G3	
□1.50 GPM	G4	

Laminar Flow Outlet	Suffix
□ 0.50 GPM	F1
□1.50 GPM	F2
	Model e.g.

Vandal Resistant Laminar Flow Outlet	Suffix
□ 0.35 GPM	H1
□ 0.50 GPM	H2
□1.00 GPM	Н3
□ 1.50 GPM	H4



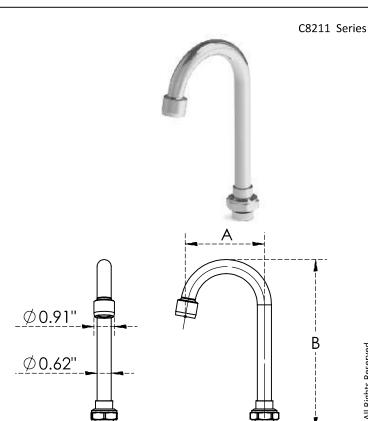

Dimensions - Weights

Ø0	62"	- iøhts			B 	2017 Kromo 118A lnc. All Bights Bosoniod
MODEL		WEIGHT	7 Kron			
	Swivel Gooseneck Length A		Length B			0
	in	mm	in	mm	lbs.	l l
C8211	3-1/2"	89	7.5"	190	0.49	
C8202	5-11/16"	144	10.36"	263	0.70	
C8212	8-1/2"	216	12.05"	306	0.80	٦,
NOTI(CE tion contain	ed herein is	not intend	led to repla	ce the full	

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

US & Canada :- +1-678 666 2001