

For Residential and Commercial Applications

Job Name _____
 Job Location _____
 Engineer _____
 Approval _____

Contractor _____
 Approval _____
 Contractor's P.O. No. _____
 Representative _____

Series

C8237 Series

Double Pantry Faucet, Wall Mount, 8" Centers, Gooseneck, Lever Handles

Sizes:

Single Hole, Single Lever deck mount with 3-3/4" to 8-1/2" Rigid Gooseneck Nozzle

Features & Benefits:

- Rigid Gooseneck Nozzle stream regulator outlet
- 1/2" NPT Female Eccentric Flange
- Lever Handles with Hot and Cold indicators
- Compression cartridges with spring checks
- Adjustable centers from 7-3/4" to 8-1/4"
- Free flow Aerator
- Warranty 3 Years




Product Compliance:

California Proposition 65

Performance Data:

Pressure: 20- 125 PSI
 Temperature: 40 °F to 140 °F

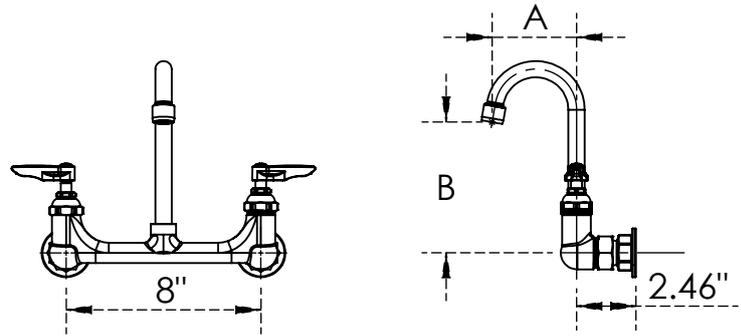

Dimensions - Weights

MODEL	Main Body		DIMENSIONS						WEIGHT
	Faucet Body	Rigid Nozzle	Body Centre Holes		Rigid Gooseneck Spread A		Length B		
			in	mm	in	mm	in	mm	
C8237	C8241.01	C8073	8"	203	3-3/4"	89	5.46	139	4.21
C8238	C8241.01	C8201	8"	203	5-11/16"	149	5.87	149	4.42
C8239	C8241.01	C8213	8"	203	8-1/2"	216	7.84"	199	4.70

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.


Aerators:

Standard Aerator	Suffix
<input type="checkbox"/> 0.20 GPM	E1
<input type="checkbox"/> 0.50 GPM	E2
<input type="checkbox"/> 1.00 GPM	E3
<input type="checkbox"/> 1.50 GPM	E4
<input type="checkbox"/> 1.80 GPM	E5
<input type="checkbox"/> 2.20 GPM	E6

Vandal Resistant Aerator	Suffix
<input type="checkbox"/> 0.35 GPM	G1
<input type="checkbox"/> 0.50 GPM	G2
<input type="checkbox"/> 1.00 GPM	G3
<input type="checkbox"/> 1.50 GPM	G4

Vandal Resistant Laminar Flow Outlet	Suffix
<input type="checkbox"/> 0.35 GPM	H1
<input type="checkbox"/> 0.50 GPM	H2
<input type="checkbox"/> 1.00 GPM	H3
<input type="checkbox"/> 1.50 GPM	H4

Laminar Flow Outlet	Suffix
<input type="checkbox"/> 0.50 GPM	F1
<input type="checkbox"/> 1.50 GPM	F2

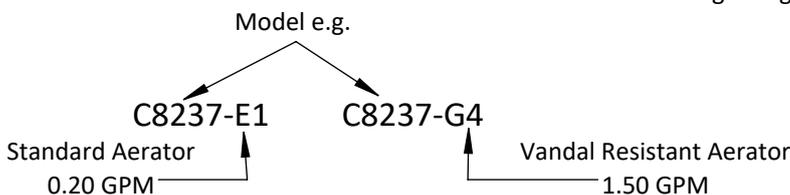

US & Canada :- +1-678 666 2001

Krome product Specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Krome Technical Service. Krome reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Krome products previously or subsequently sold. For most updated specification sheet, go to www.aluids.com