

# For Residential and Commercial Applications

Job Name \_\_\_\_\_ Contractor \_\_\_\_\_  
 Job Location \_\_\_\_\_ Approval \_\_\_\_\_  
 Engineer \_\_\_\_\_ Contractor's P.O. No. \_\_\_\_\_  
 Approval \_\_\_\_\_ Representative \_\_\_\_\_

C8366 Series

## Series

### Double Pantry 4" Deck Mount with Swivel Base Faucet

#### Sizes:

4" Deck Mount Pantry Faucets with 6" to 18" Swing Nozzle

#### Features & Benefits:

- Swing Nozzle stream regulator outlet
- 1/2" NPT Female Eccentric Flange
- Lever Handles with HOT & COLD Indexes
- Compression cartridges with spring checks
- Adjustable centers from 3-3/4" to 4-1/4"
- With free flow outlet aerator
- Warranty 3 Years


#### Product Compliance:

California Proposition 65

#### Performance Data:

Pressure: 20- 125 PSI

Temperature: 40 °F to 140 °F

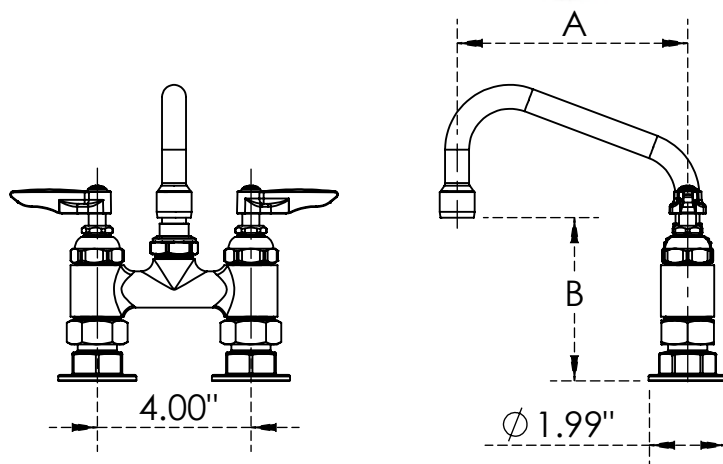

#### Dimensions - Weights

MODEL	Main Body		DIMENSIONS						WEIGHT
	Faucet Body	Swivel Nozzle	Body Center Holes		Swivel Nozzle Length A		Length B		
			in	mm	in	mm	in	mm	lbs.
C8366	C8277.50	C8179	4"	102	6"	152	4.25"	108	4.43
C8367	C8277.50	C8180	4"	102	8"	203	5"	127	4.49
C8368	C8277.50	C8181	4"	102	10"	254	5.76"	146	4.57
C8369	C8277.50	C8145	4"	102	12"	305	6.51"	165	4.68
C8370	C8277.50	C8217	4"	102	14"	356	7.62"	184	4.72
C8371	C8277.50	C8182	4"	102	18"	457	8.77"	223	4.84

#### NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

#### Aerators:

Standard Aerator	Suffix	Vandal Resistant Aerator	Suffix
<input type="checkbox"/> 0.20 GPM	E1	<input type="checkbox"/> 0.35 GPM	G1
<input type="checkbox"/> 0.50 GPM	E2	<input type="checkbox"/> 0.50 GPM	G2
<input type="checkbox"/> 1.00 GPM	E3	<input type="checkbox"/> 1.00 GPM	G3
<input type="checkbox"/> 1.50 GPM	E4	<input type="checkbox"/> 1.50 GPM	G4
<input type="checkbox"/> 1.80 GPM	E5		
<input type="checkbox"/> 2.20 GPM	E6		

Laminar Flow Outlet	Suffix	Vandal Resistant Laminar Flow Outlet	Suffix
<input type="checkbox"/> 0.50 GPM	F1	<input type="checkbox"/> 0.35 GPM	H1
<input type="checkbox"/> 1.50 GPM	F2	<input type="checkbox"/> 0.50 GPM	H2
		<input type="checkbox"/> 1.00 GPM	H3
		<input type="checkbox"/> 1.50 GPM	H4

Model e.g.

C8366-E1

Standard Aerator  
0.20 GPM

C8366-G3

Vandal Resistant Aerator  
1.00 GPM

ALUIDS

US & Canada :- +1-678 666 2001

Krome product Specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Krome Technical Service. Krome reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Krome products previously or subsequently sold. For most updated specification sheet, go to [www.aluids.com](http://www.aluids.com)