

# For Residential and Commercial Applications

Job Name \_\_\_\_\_ Contractor \_\_\_\_\_  
 Job Location \_\_\_\_\_ Approval \_\_\_\_\_  
 Engineer \_\_\_\_\_ Contractor's P.O. No. \_\_\_\_\_  
 Approval \_\_\_\_\_ Representative \_\_\_\_\_

## Series

C8437 Series

Single Hole Deck Mount Pantry Faucet,  
 Single Lever with Gooseneck Spout

### Sizes:

Single Hole, Single Lever deck mount with  
 3-1/2" to 8-1/2" Swivel Gooseneck Nozzle

### Features & Benefits:

- Swivel Gooseneck Nozzle stream regulator outlet
- Tailpiece and nut to provide 1/4" NPT male connection.
- 1/2" NPSM male Inlet
- Lever handle with color coded index
- Compression cartridges with spring checks
- With free flow outlet aerator
- Warranty 3 Years


### Product Compliance:

California Proposition 65

### Performance Data:

Pressure: 20- 125 PSI

Temperature: 40 °F to 140 °F

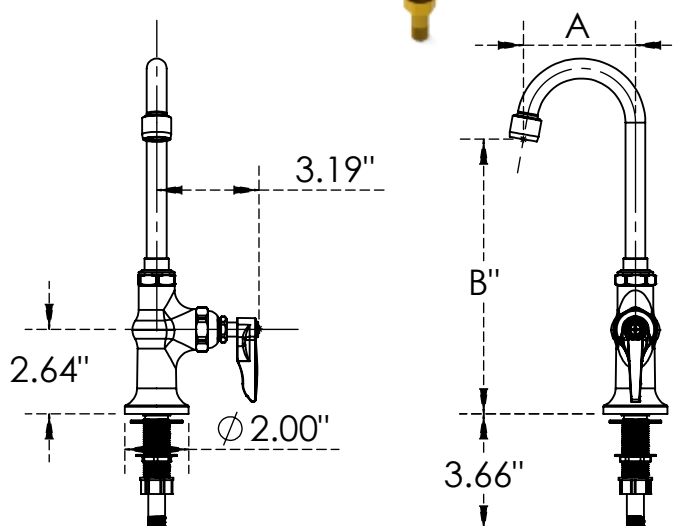

### Dimensions - Weights

MODEL	Main Body		Swivel Gooseneck Spread A		Length B		WEIGHT
	Faucet Body	Swivel Nozzle	in	mm	in	mm	
C8437	C8432.50	C8211	3-1/2"	89	8.58"	218	3.03
C8472	C8432.50	C8202	5-11/16"	144	9.76"	248	3.24
C8522	C8432.50	C8212	8-1/2"	216	12.11"	308	3.52

### NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.


### Aerators:

Standard Aerator	Suffix
<input type="checkbox"/> 0.20 GPM	E1
<input type="checkbox"/> 0.50 GPM	E2
<input type="checkbox"/> 1.00 GPM	E3
<input type="checkbox"/> 1.50 GPM	E4
<input type="checkbox"/> 1.80 GPM	E5
<input type="checkbox"/> 2.20 GPM	E6

Vandal Resistant Aerator	Suffix
<input type="checkbox"/> 0.35 GPM	G1
<input type="checkbox"/> 0.50 GPM	G2
<input type="checkbox"/> 1.00 GPM	G3
<input type="checkbox"/> 1.50 GPM	G4

Laminar Flow Outlet	Suffix
<input type="checkbox"/> 0.50 GPM	F1
<input type="checkbox"/> 1.50 GPM	F2

Vandal Resistant Laminar Flow Outlet	Suffix
<input type="checkbox"/> 0.35 GPM	H1
<input type="checkbox"/> 0.50 GPM	H2
<input type="checkbox"/> 1.00 GPM	H3
<input type="checkbox"/> 1.50 GPM	H4

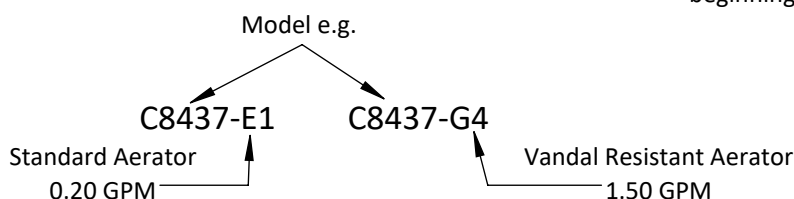

US & Canada :- +1-678 666 2001

Krome product Specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Krome Technical Service. Krome reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Krome products previously or subsequently sold. For most updated specification sheet, go to [www.aluids.com](http://www.aluids.com)

ALUIDS