
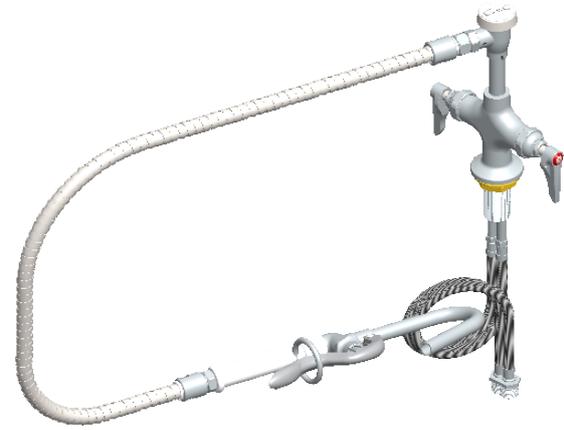


# For Residential and Commercial Applications

Job Name \_\_\_\_\_ Contractor \_\_\_\_\_  
Job Location \_\_\_\_\_ Approval \_\_\_\_\_  
Engineer \_\_\_\_\_ Contractor's P.O. No. \_\_\_\_\_  
Approval \_\_\_\_\_ Representative \_\_\_\_\_

## Series:

Deck Mount Pot Filler with 1.2 GPM  
C8555

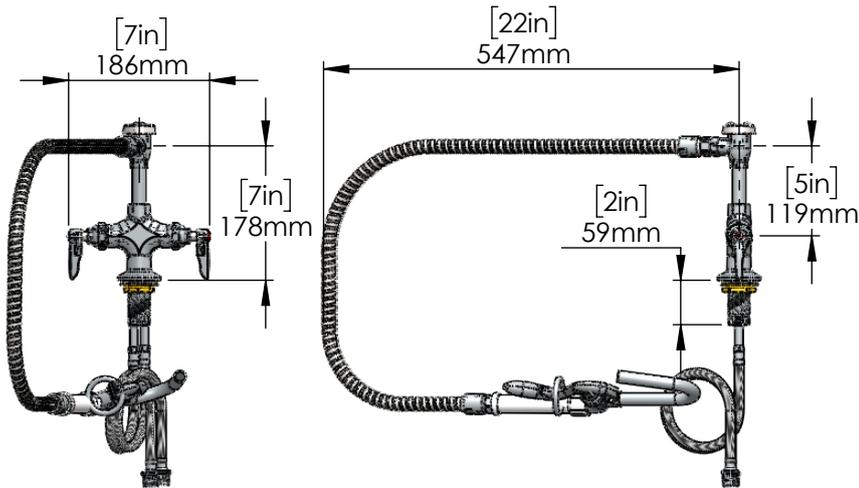

## Features & Benefits:

- Deck Mount Single Hole Double index
- 1/2" NPT Female Eccentric Flange
- Lever Handles with HOT & COLD Indexes
- Compression cartridges with spring checks

## Performance Data:

- Pressure: 20 - 125 psi [1.38 - 8.62 bar]
- Temperature: 40° F - 140° F [4.44 C - 60 C]

## Optional Cartridges With Checks

- Quarter-Turn Cerama w/ Check Valve
- Quarter-Turn Eterna w/ Spring Check (Standard)

## Optional Handles:

- 4" Wrist Action
- Lever

## Product Compliance:

- California proposition 65

**Warranty:** One Years (Limited)

## NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.



US & Canada :- +1-678 666 2001

Krome product Specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Krome Technical Service. Krome reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Krome products previously or subsequently sold. For most updated specification sheet, go to