

For Residential and Commercial Applications


Job Name _____
Job Location _____
Engineer _____
Approval _____

Contractor _____
Approval _____
Contractor's P.O. No. _____
Representative _____

Series:

Deck Mount 8" Centers pot filler

C8556

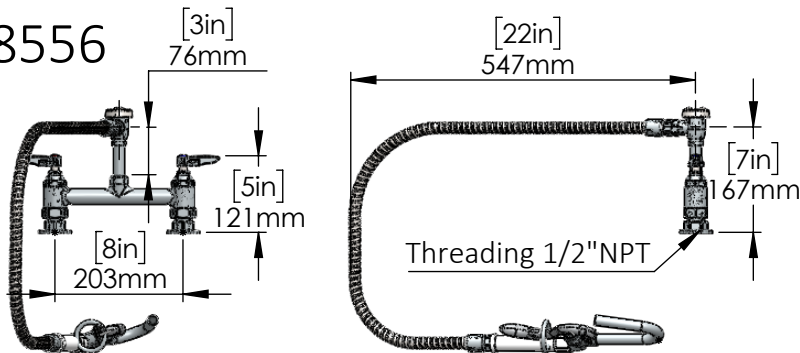

Features & Benefits:

- 1/2" NPT Female Eccentric Flange
- Lever Handles with HOT & COLD Indexes
- Compression cartridges with spring checks
- Good quality and Suitable to use.
- built-in back flow prevented
- 72" heavy-duty stainless steel clad flexible hose
- Built-in vacuum breaker
- Full replacement parts available
- Its close combination can really achieve 100% leak protection. And saves water wastage
- Provide stable water pressure and smooth rotation.

Performance Data:

- Pressure: 20 - 125 psi [1.38 - 8.62 bar]
- Temperature: 40 F - 140 F [4.44 C - 60 C]

Optional Cartridges With Checks

- Quarter-Turn Cerama w/ Check Valve(Standard)
- Quarter-Turn Eterna w/ Spring Check

Product Compliance:

- California proposition 65

Material:

- Stainless steel

Warranty: One Years (Limited)

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.



US & Canada :- +1-678 666 2001

Krome product Specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Krome Technical Service. Krome reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Krome products previously or subsequently sold. For most updated specification sheet, go to

ALUIDS