
# For Residential and Commercial Applications

Job Name	Contractor
Job Location	Approval
Engineer	Contractor's P.O. No.
Approval	Representative

## **Series:**

Double Hole Wall Mount Pot Filler Faucet with 8" Centres- 6" Jointed Spout C8558

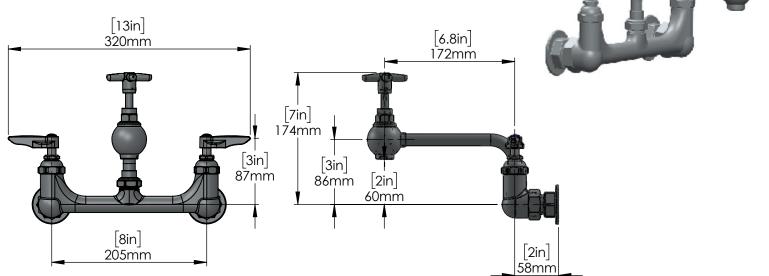

#### Features & Benefits:

- 6" Spout is convenient filling of water into vessels
- Lever handles with color coded indexes
- Finish Polished chrome plated
- Body made of brass

#### **Performance Data:**

Pressure: 20 - 125 psiTemperature: 40°F - 140°F

Foam Flow Aerator

#### **Aerators:**

Standard	Suffix	Vandal Resistant	
Aerator	Sullix	Laminar Flow	Suffix
□ 0.20 GPM	E1	Outlet	
□ 0.50 GPM	E2		114
□ 1.00 GPM	E3	□0.35 GPM	H1
□ 1.50 GPM	E4	□0.50 GPM	H2
□ 1.80 GPM	Ē5	□1.00 GPM	H3
□ 2.20 GPM	E6	□1.50 GPM	H4
Laminar Flow	Suffix	Vandal Resistant	Suffix
Outlet	Sullix	Aerator	Sullix
□0.50 GPM	F1	□0.35 GPM	G1
□ 0.30 GPIVI		□ 0.50 GPM	G2
☐ 1.50 GPM	F2	□1.00 GPM	G3

## **Product Compliance:**

California proposition 65

Warranty: One Years (Limited)

### **NOTICE**

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.



